

EXPLORE
NEW IDEAS &
UNIQUE STYLE.

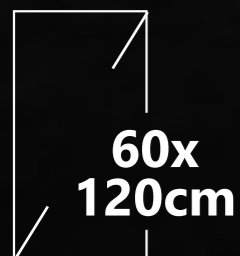

Size :

60x120cm

(GLAZED VITRIFIED TILES)

Finish :

Glossy

Thickness :

8.5 MM



Redefining Aesthetic

Surface and finish with the perfect equilibrium of sheen and element to anchor the environment of indulgence.



Experience the epitome of elegance with our Endless tiles Collection.

Each tile is a masterpiece, embodying precision, sophistication, and unrivaled innovation in design.

INTRODUCTION


ENDLESS

collection

Endless Tiles are ideal for small areas, as they make any area look brighter and more spacious.

ENDLESS



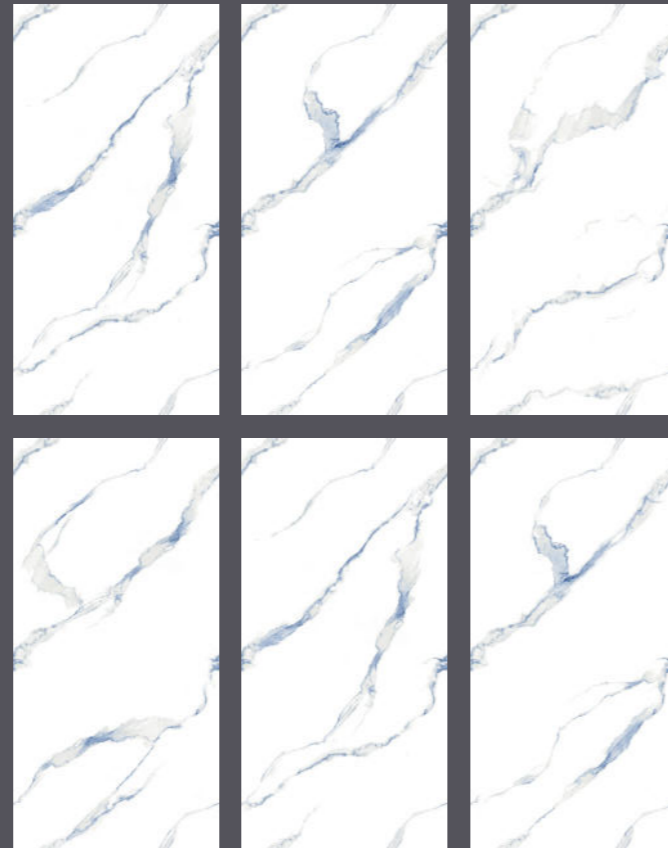


EAGLE COBALT

RANDOM 04

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

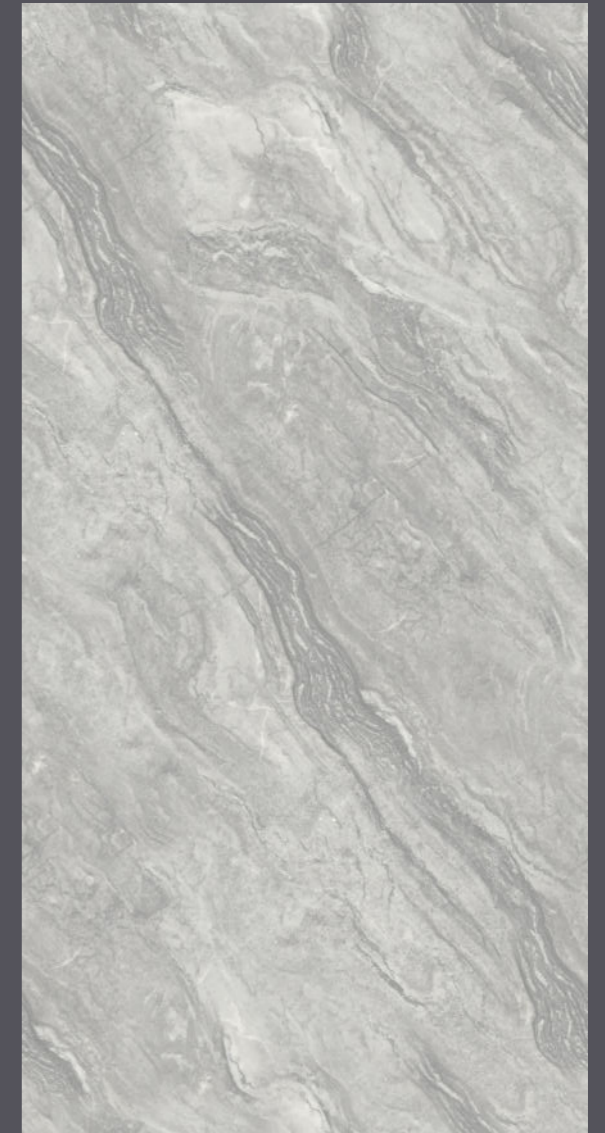

RANDOM 04

EDEN GREY

GLOSSY
FINISH



High Strength



Easy to Install




<0.05% Water Absorption



Random Design

EAGLE COBALT



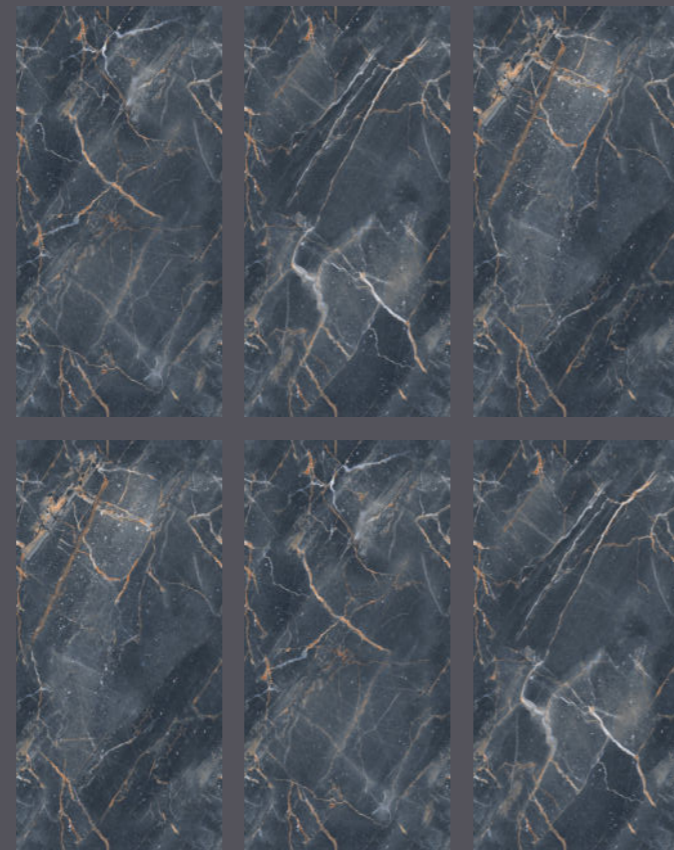


EDINA AZURE

RANDOM 03

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

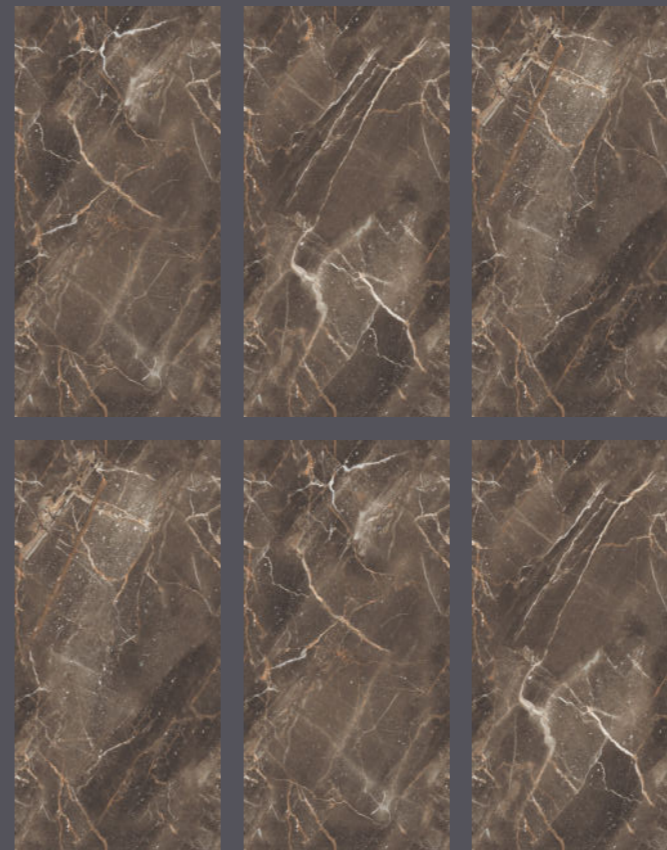

RANDOM 03

EDINA COFFEE

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design

EDINA COFFEE





EDWIN IVORY

RANDOM 04

GLAZED
VITRIFIED TILES

600X SIZE
1200MM



RANDOM 04

EDWIN SILVER

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design

EDWIN IVORY






ELITE PEARL

RANDOM 04

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

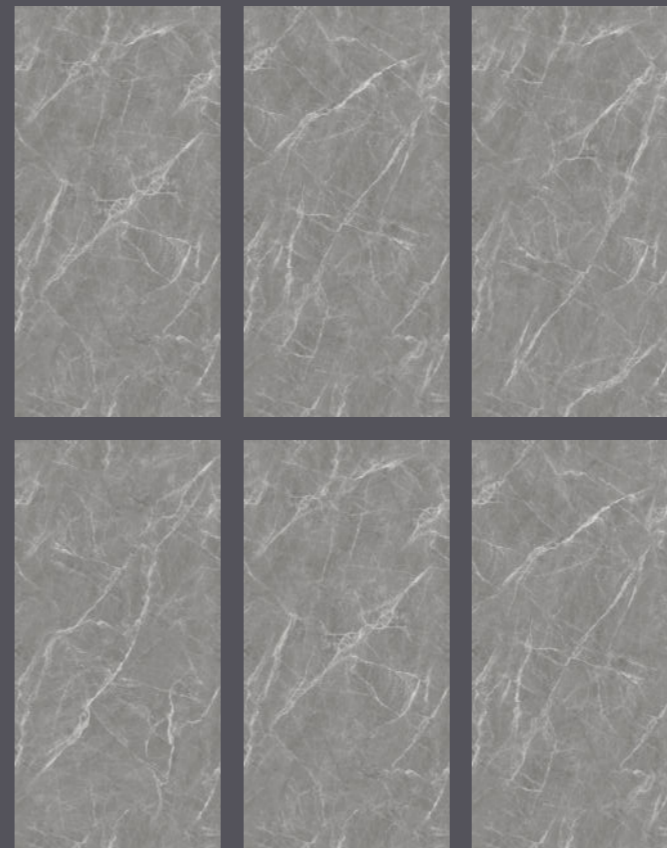

RANDOM 04

ELITE SMOKE

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design

ELITE PEARL





ELUDE GREY

RANDOM 04

RANDOM 04

ELUDE PEARL

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design

ELUDE GREY







ENRICH BEIGE

RANDOM 03

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

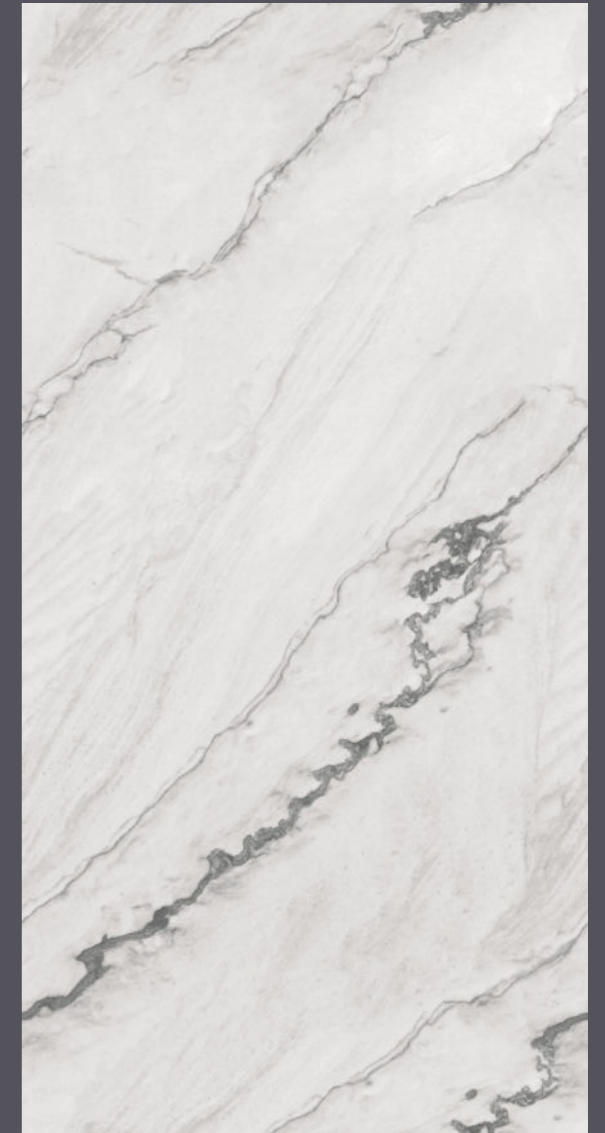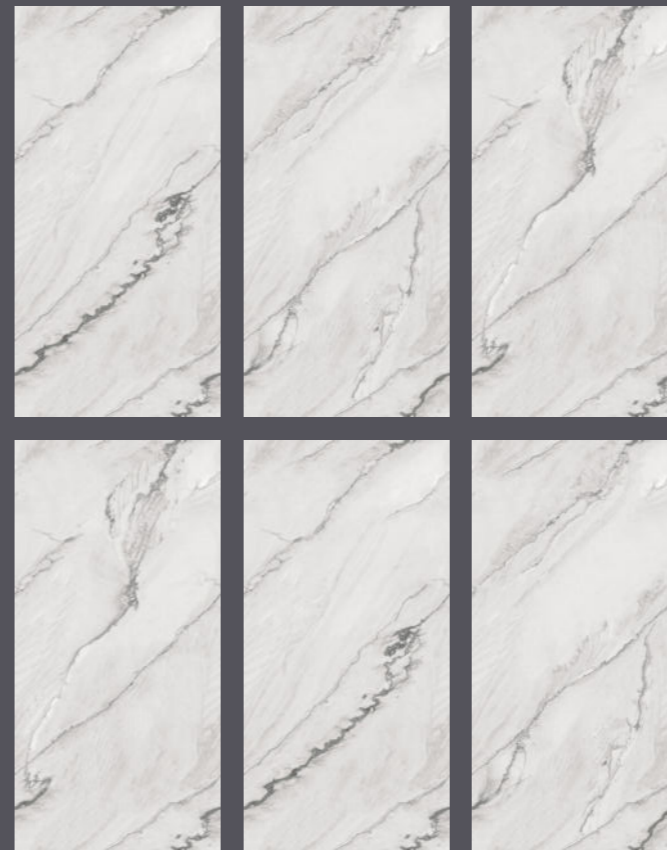

RANDOM 03

ENRICH BIANCO

GLOSSY
FINISH



High
Strength



Easy to
Install





<0.05% Water
Absorption



Random
Design

ENRICH BEIGE



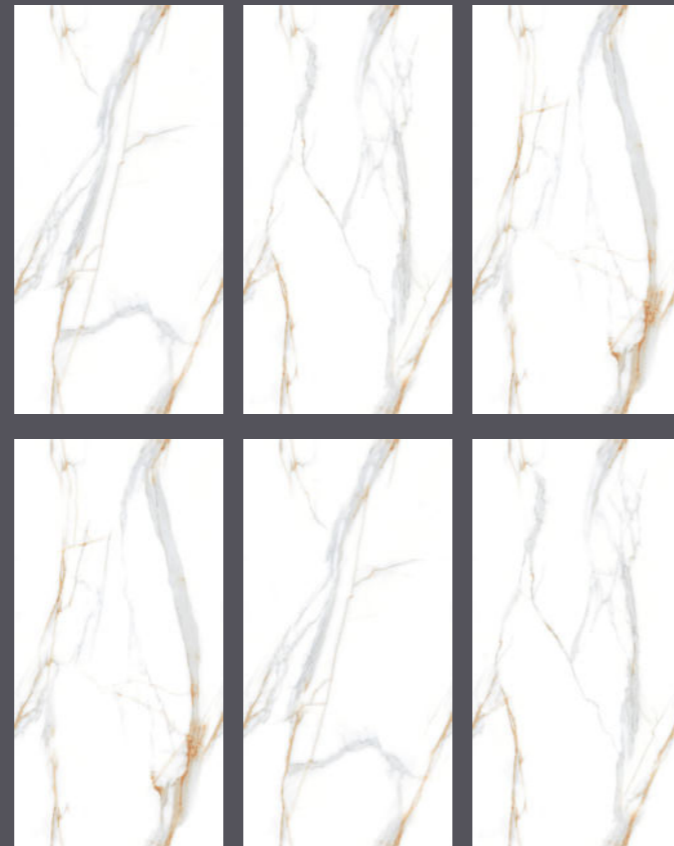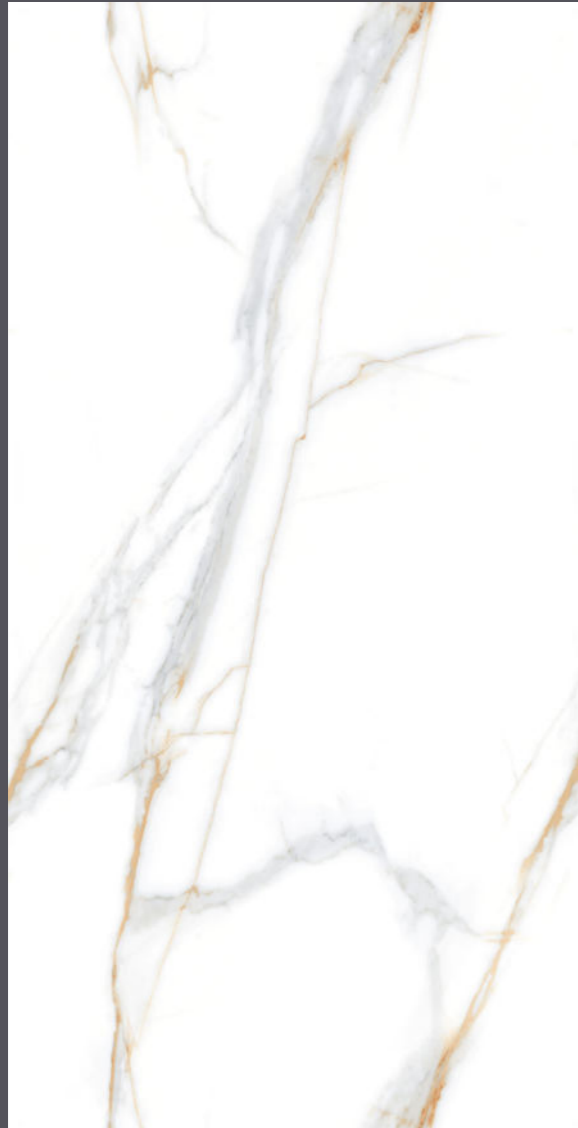


ENVY WHITE

RANDOM 03

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

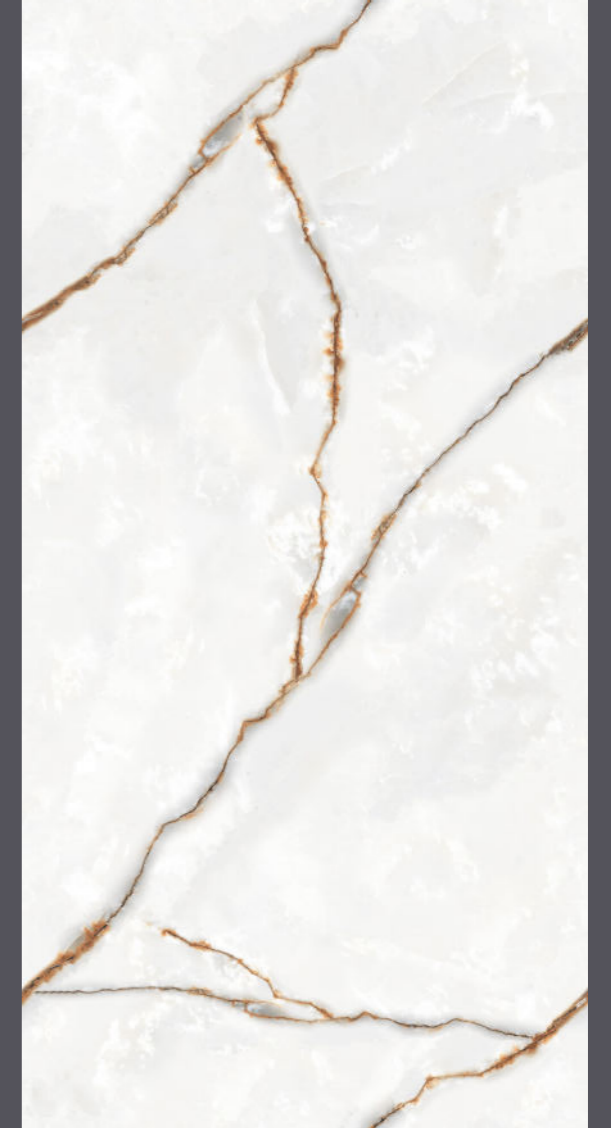

RANDOM 03

ERA OXIODO

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design

ENVY WHITE





ESPARTO CAMEL

RANDOM 04

GLAZED
VITRIFIED TILES

600X SIZE
1200MM



RANDOM 04

ESPARTO GREY

GLOSSY
FINISH



High Strength



Easy to Install




<0.05% Water Absorption



Random Design

ESPARTO CAMEL



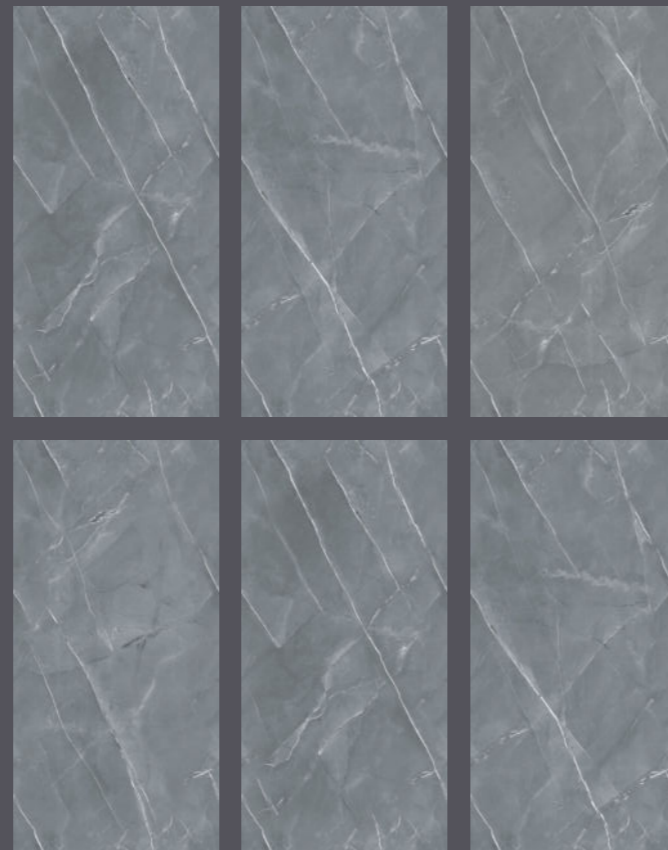


ESTRELLA DOVE

RANDOM 04

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

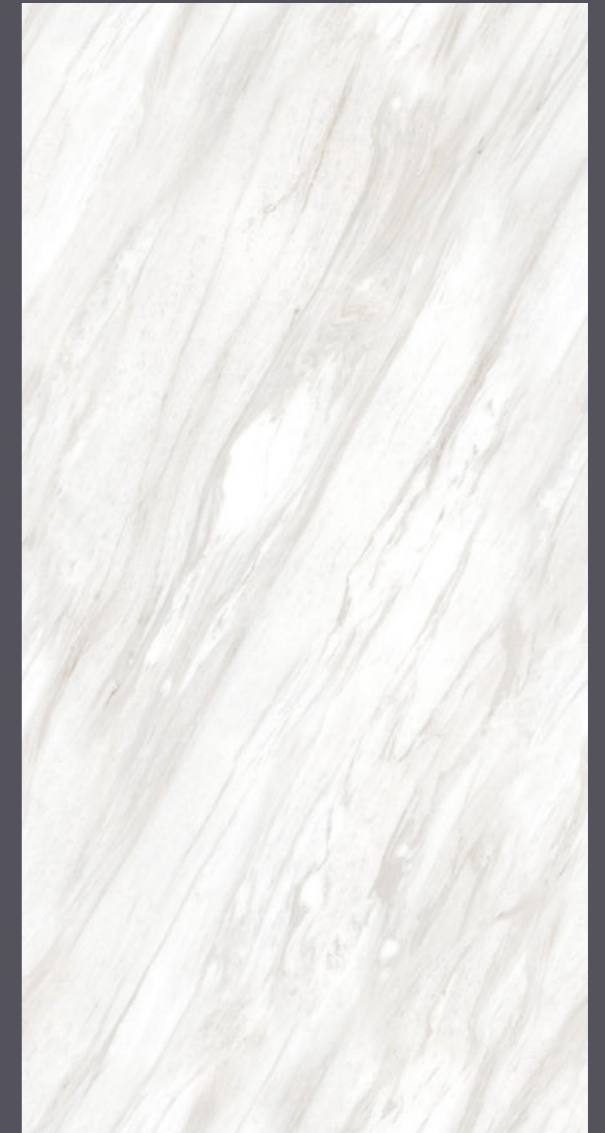

RANDOM 03

ETIC CARRARA

GLOSSY
FINISH



High Strength



Easy to Install




<0.05% Water Absorption



Random Design

ETIC CARRARA



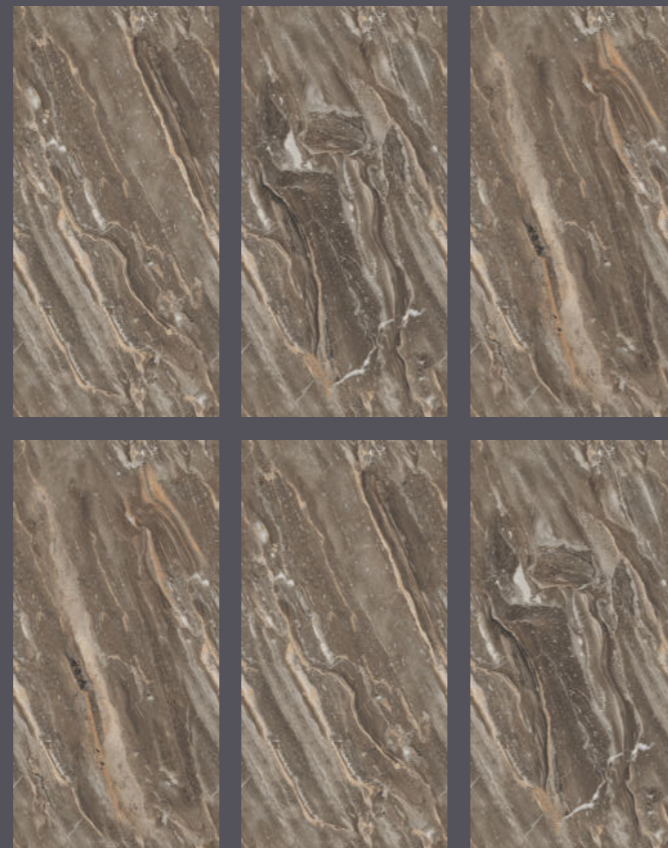

EVIL WALNUT

RANDOM 03



GLAZED
VITRIFIED TILES

600X SIZE
1200MM

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design




EVON TAUPE

RANDOM 04

GLAZED
VITRIFIED TILES

600X SIZE
1200MM

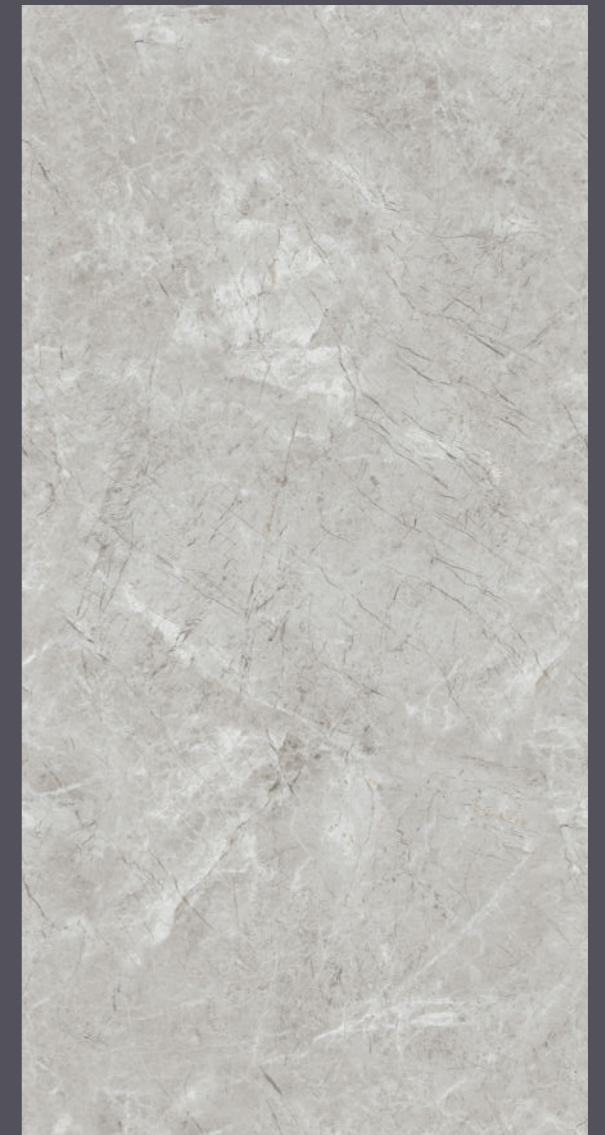

RANDOM 04

EVON GREY

GLOSSY
FINISH



High Strength



Easy to Install



<0.05% Water Absorption



Random Design

EVON TAUPE



60X120CM | GLAZED PORCELAIN TILES TECHNICAL DETAILS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	MEAN VALUE OF VOYATI	TEST METHOD
REGULATORY PROPERTIES			
Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.50%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.20%	ISO-10545-2
Color Differences	Unaltered	No Change	ISO-10545-16
Glossiness	As per Mfg.	Min. 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.00 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of Rupture	Min. 35N/mm ²	Min. 40N/mm ²	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
Moh's Hardness	As Per Mfg.	Min. 4	EN 101
THERMO HYDROMETRIC PROPERTIES			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion(COE)	Max 9.0x10 ⁻⁶	Max 6.5x10 ⁻⁶	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES			
Slip Resistance	>0.40	>0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As Per Mfg.	Does not yield Pb & Cd	ISO-10545-15

VOYATI
CERAMICS

PACKING DETAIL

Size	Pcs. / Box	Coverage Area / Box	Weight / Box
60x120 (24"x48")	2	1.44 sq. mtr.	27.5 kg.

VOYATI

C E R A M I C S

Max Granito Pvt. Ltd.

8-A National Highway, B/h 132kV Substation,
Jambudiya, Morbi - 363 642, Gujarat, INDIA

info@voyati.in | [+91 84694 59999](tel:+918469459999) | www.voyati.in

