


---

**DISCOVER THE  
VERSATILITY TO  
UNLOCK THE MAGIC**



Size :

**60x120cm**

(GLAZED VITRIFIED TILES)

Finish :

**Matt**


Thickness :

**8.5 MM**



## Redefining Aesthetic

Surface and finish with the perfect equilibrium of sheen and element to anchor the environment of indulgence.

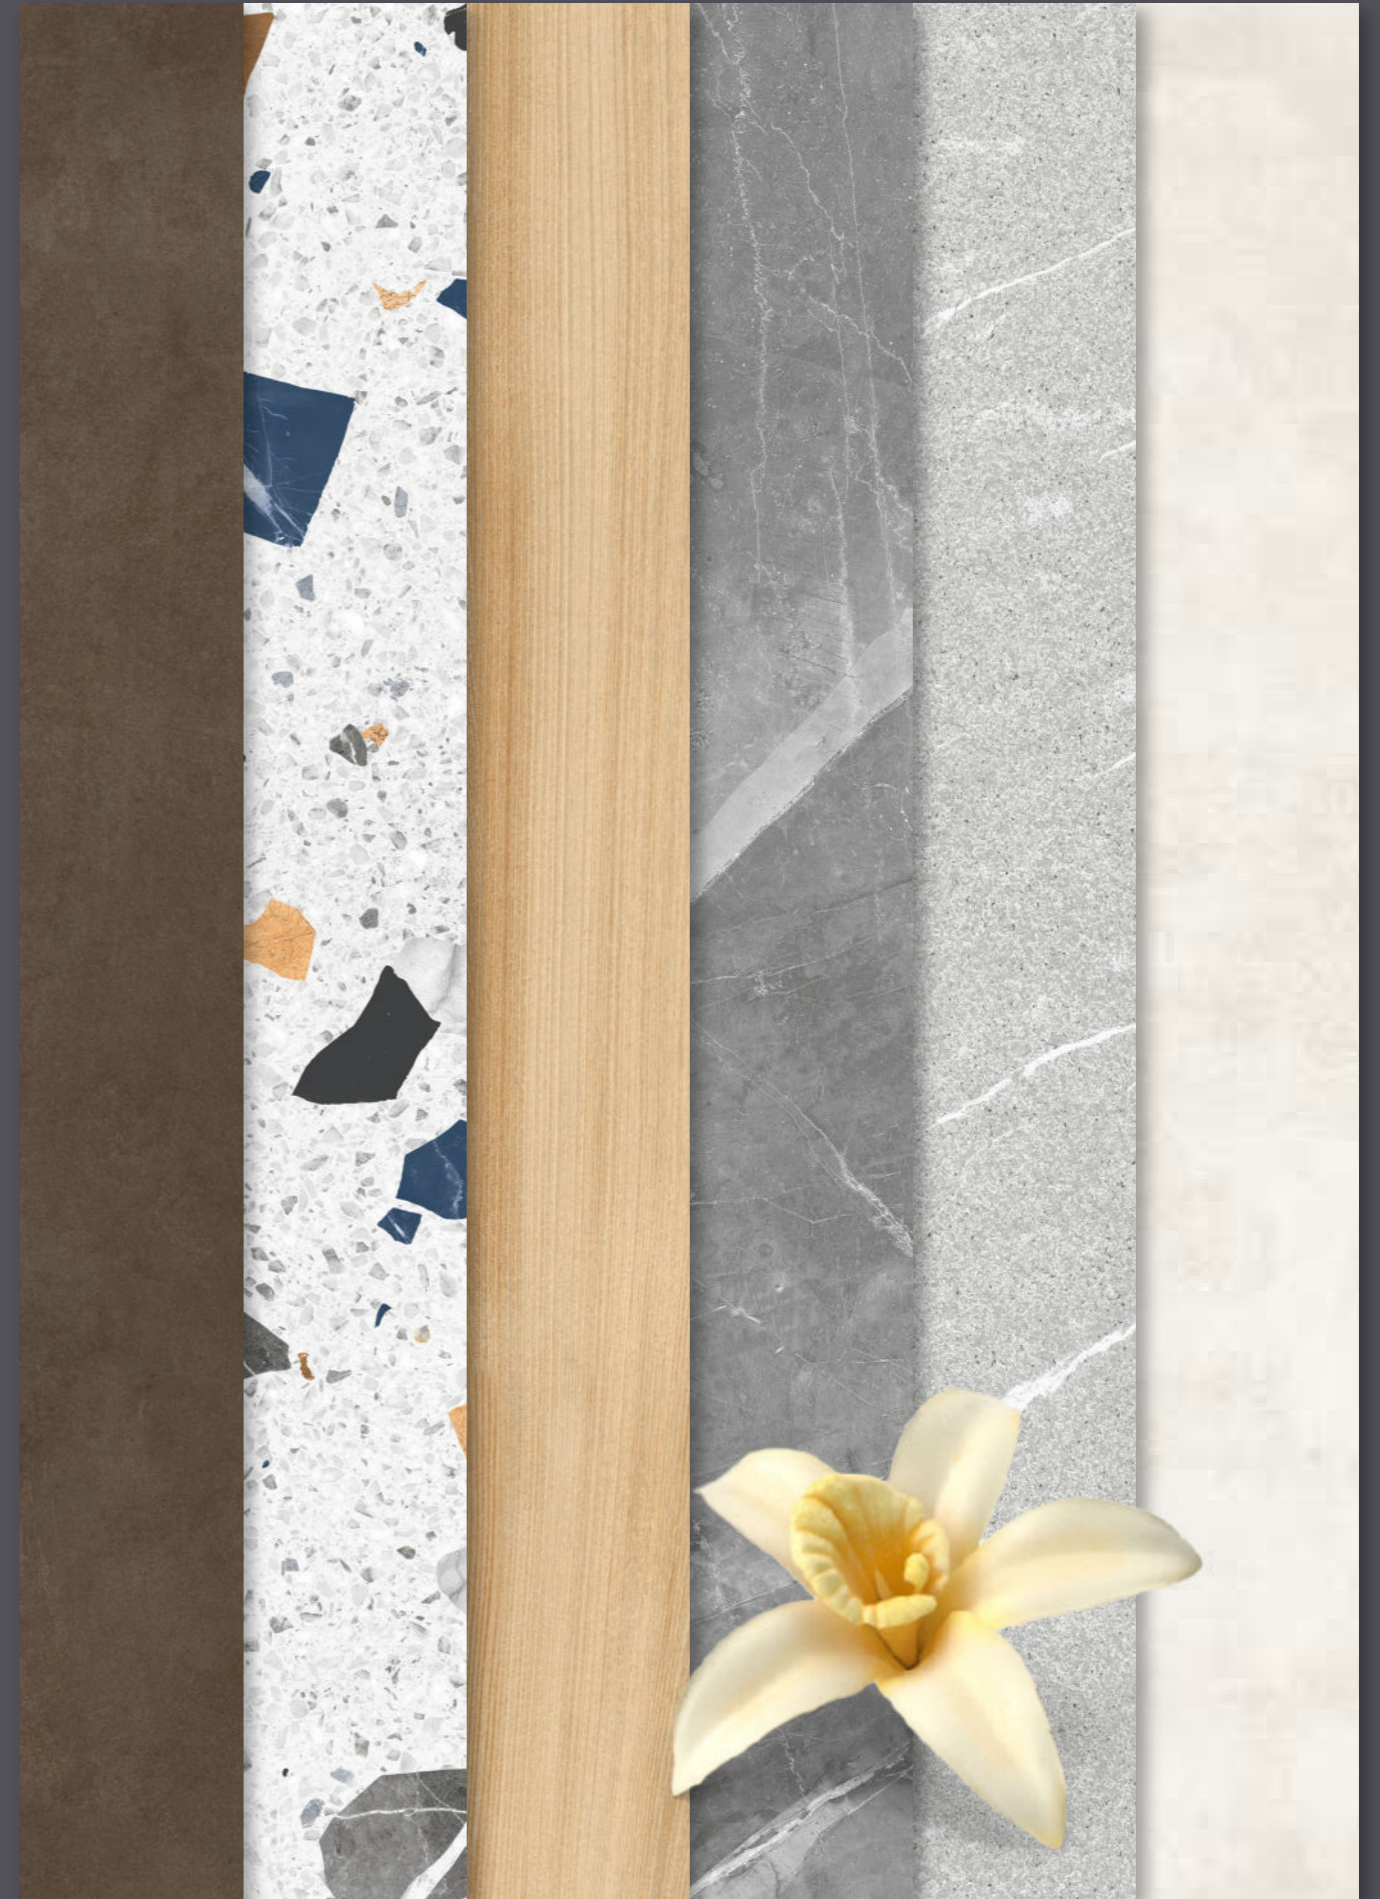

Experience the epitome of elegance with our Glossy & Matt tiles Collection.

Add a touch of elegance and Sophistication to any space. A stunning range of Matt tiles With a reflective finish that Creates a sparkling effect.

INTRODUCTION

**MATT**  
collection


Matt tiles creating a stunning visual effect that Adds depth and dimension to the space. Also feature a subtle shimmer, adding a touch Of glamour and luxury to any room.

MATT





ADRASIA SILVER

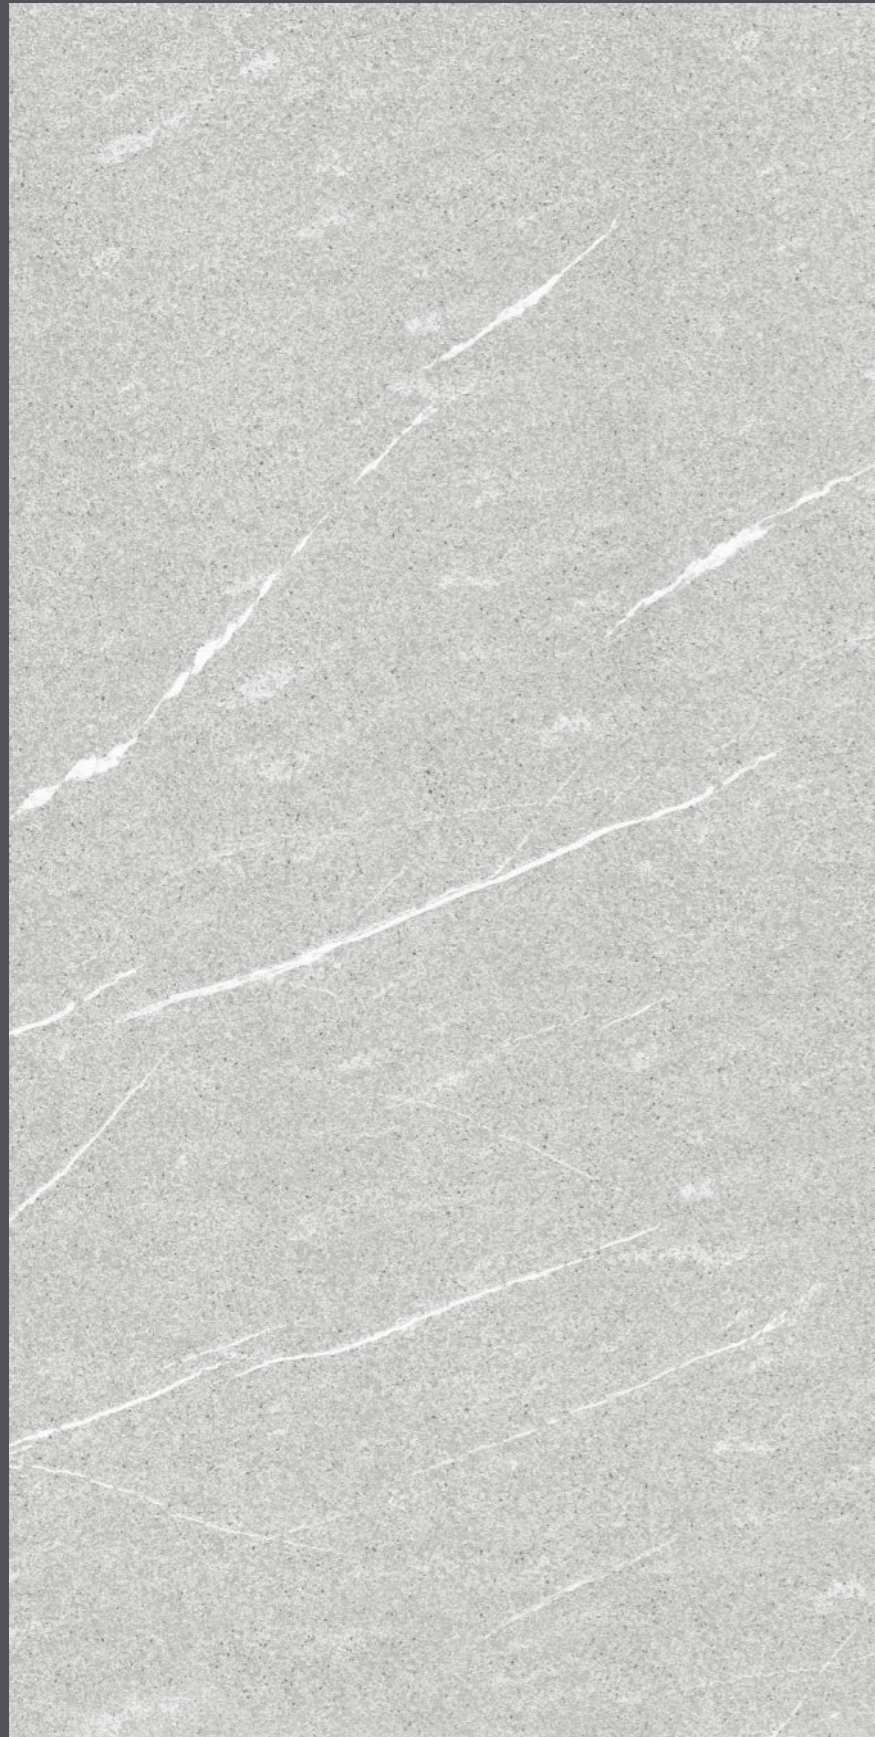

# ADRASIA SILVER

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH

**RANDOM**  
**05**

**GLAZED**  
VITRIFIED TILES



High  
Strength



Easy to  
Install




<0.05% Water  
Absorption



Random  
Design



ARMANI

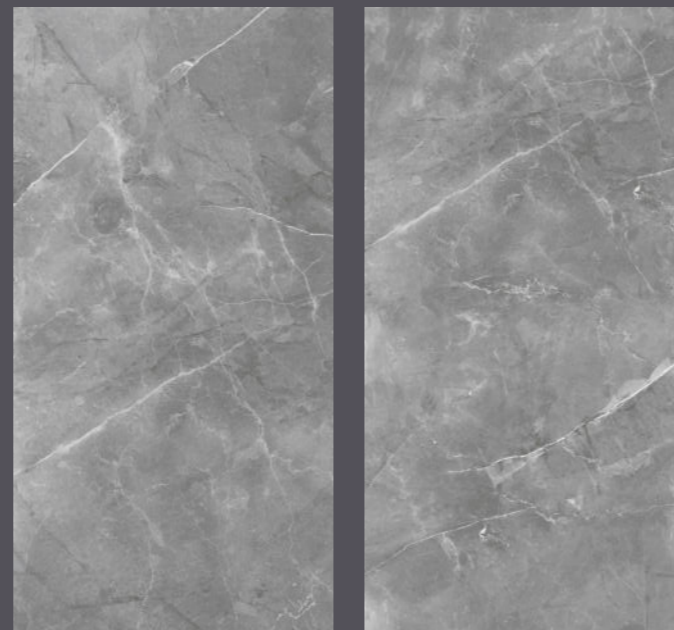

# ARMANI |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH |

**RANDOM**  
05 |

**GLAZED**  
VITRIFIED TILES |



High  
Strength



Easy to  
Install



<0.05% Water  
Absorption





Random  
Design



AVILA



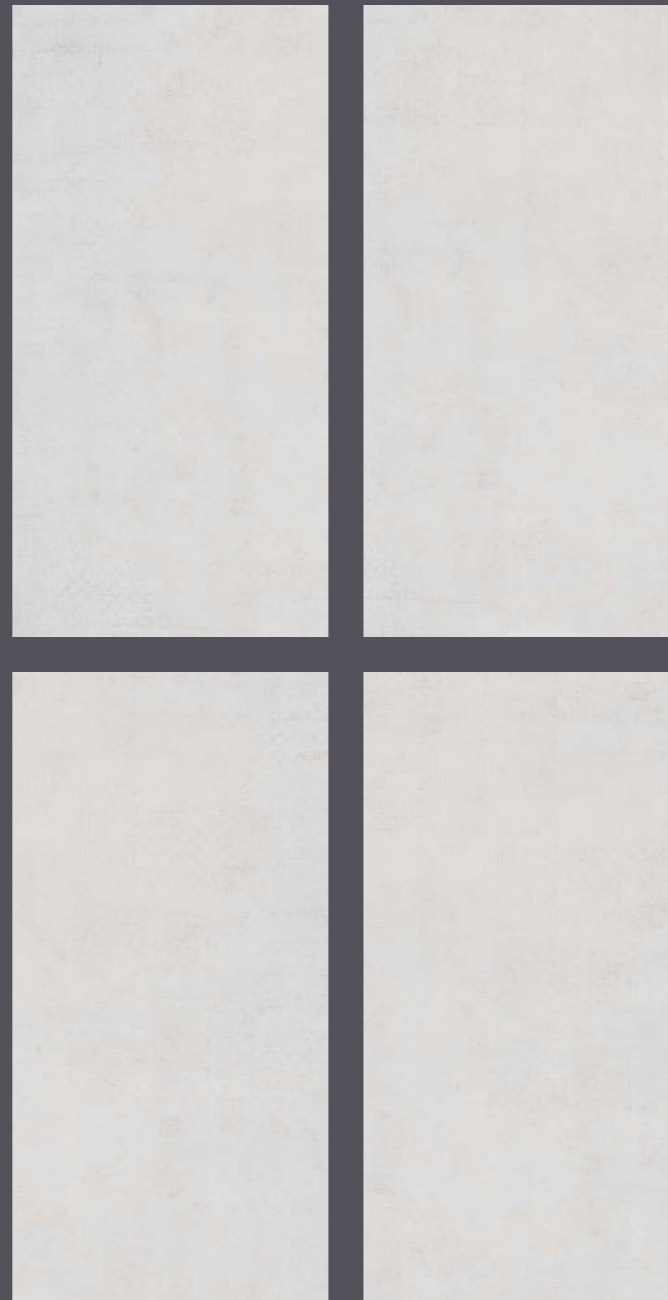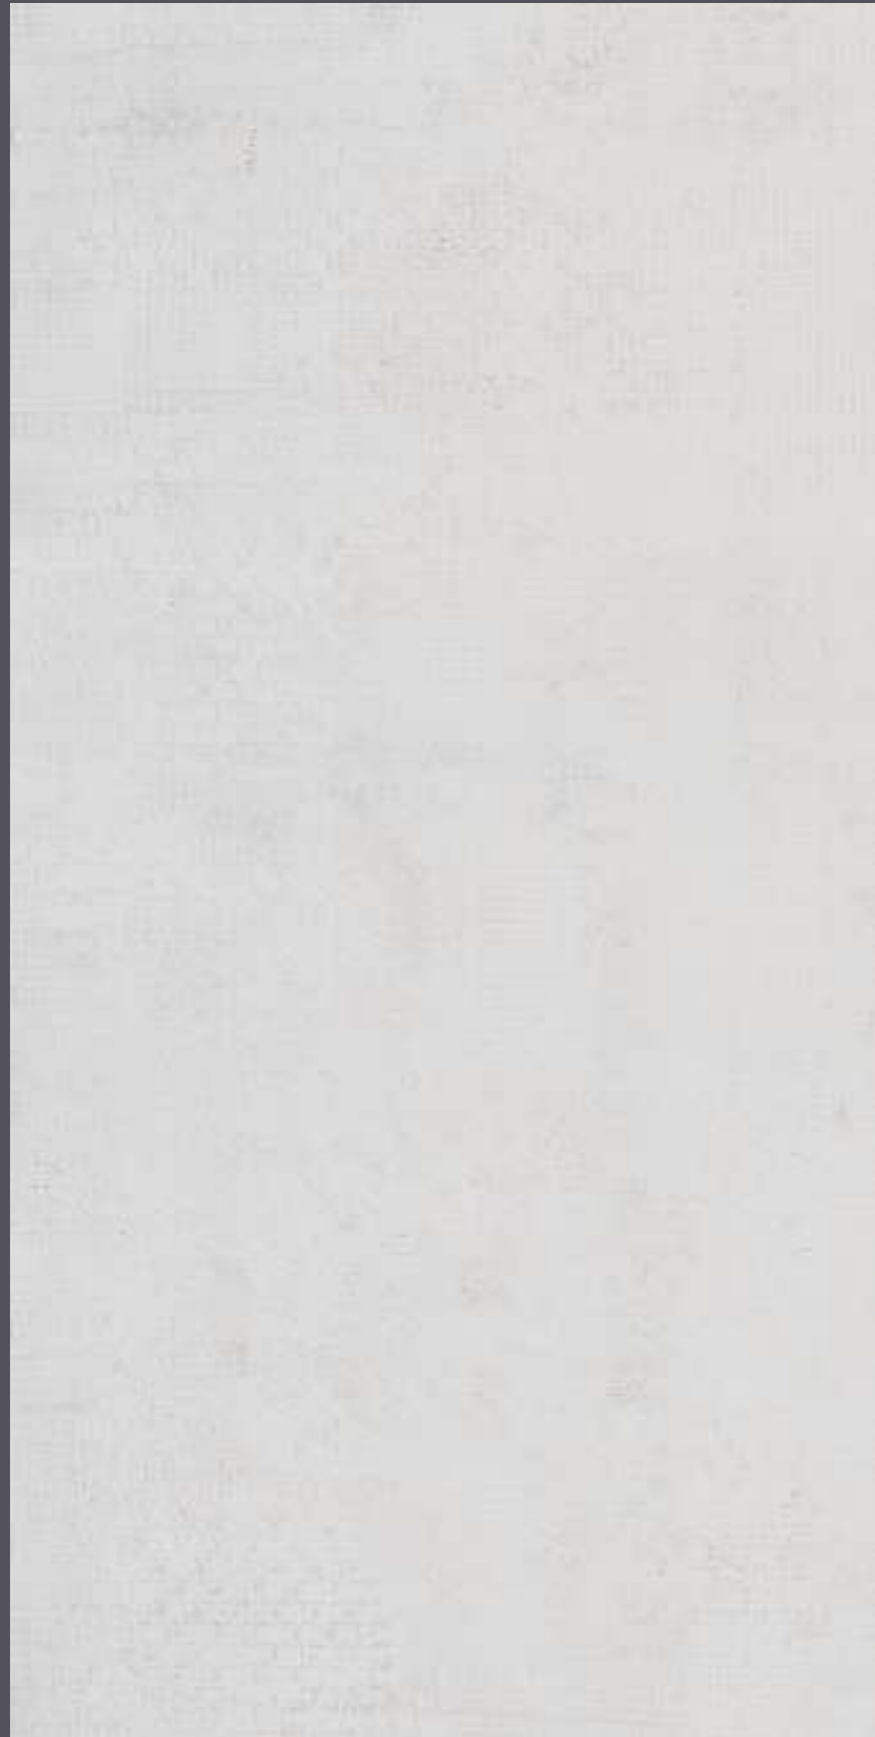

**AVILA** |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH |

**RANDOM**  
04 |

**GLAZED**  
VITRIFIED TILES |



High  
Strength



Easy to  
Install



<0.05% Water  
Absorption




Random  
Design



LICON

**MATT**  
collection

**VOYATI**  
CERAMICS

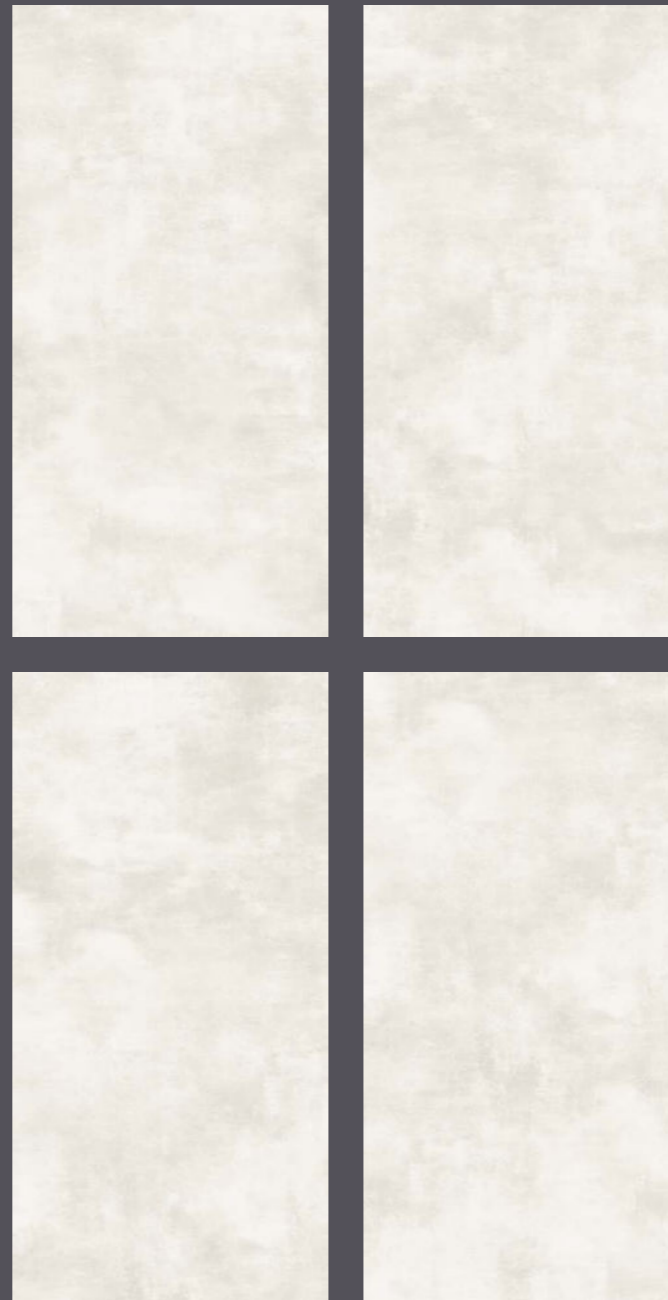

**LICON** |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH

**RANDOM**  
04

**GLAZED**  
VITRIFIED TILES



High  
Strength



Easy to  
Install



<0.05% Water  
Absorption



Random  
Design

[www.voyati.in](http://www.voyati.in)



OAK WOOD



# OAK WOOD |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH

**RANDOM**  
05

**GLAZED**  
VITRIFIED TILES



High  
Strength



Easy to  
Install




<0.05% Water  
Absorption



Random  
Design



OLVIDA BEIGE

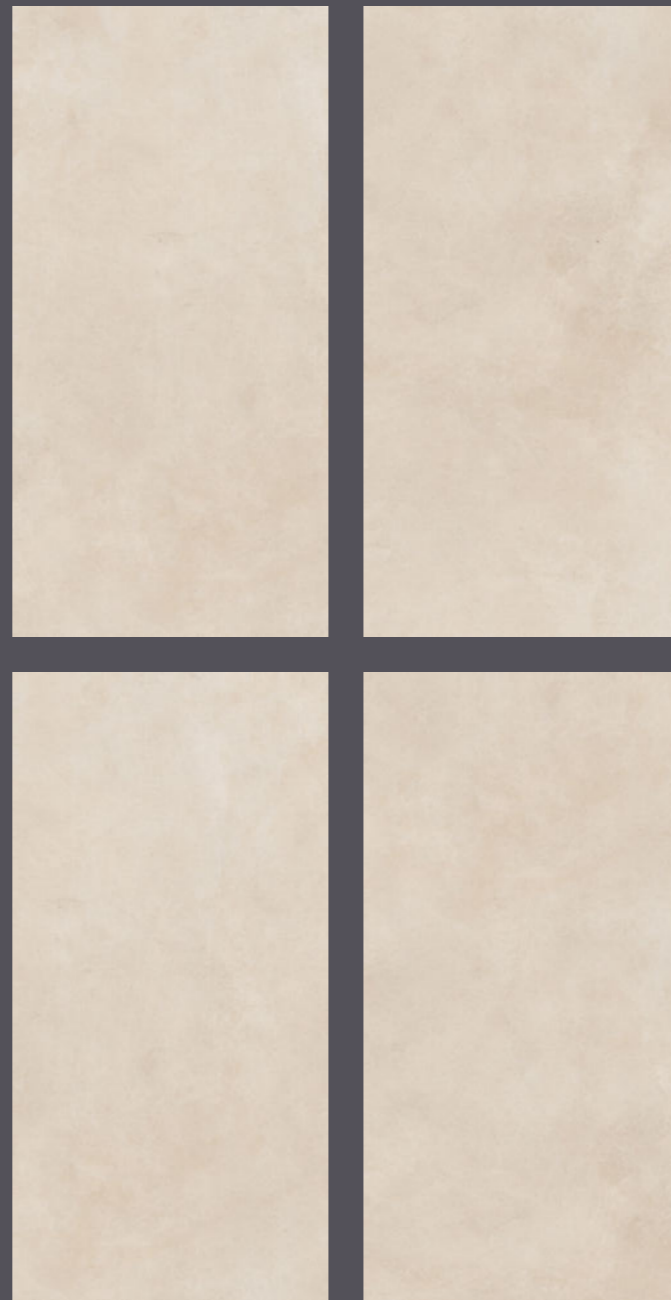

# OLVIDA BEIGE |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH

**RANDOM**  
05

**GLAZED**  
VITRIFIED TILES



High  
Strength



Easy to  
Install



<0.05% Water  
Absorption




Random  
Design



OLVIDA BROWN



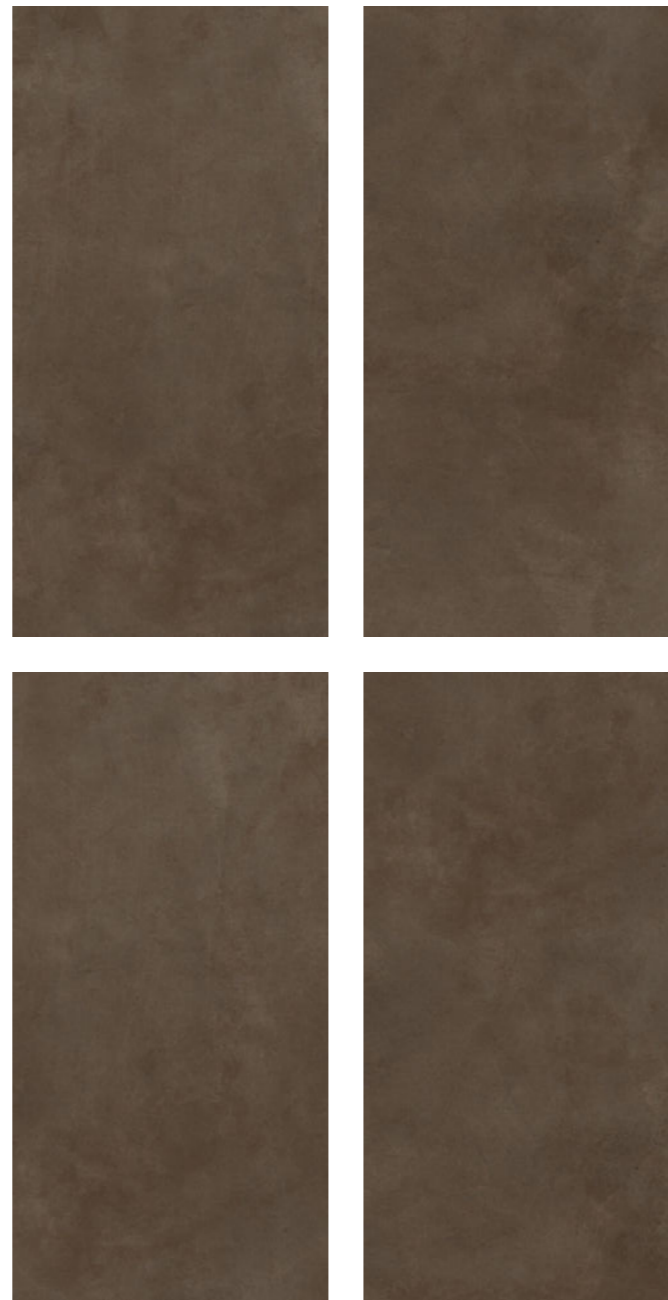

# OLVIDA BROWN |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH |

**RANDOM**  
05 |

**GLAZED**  
VITRIFIED TILES |



High  
Strength



Easy to  
Install




<0.05% Water  
Absorption



Random  
Design



RUSTIC WHITE



# RUSTIC WHITE

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH

**GLAZED**  
VITRIFIED TILES



High  
Strength



Easy to  
Install







<0.05% Water  
Absorption



Random  
Design



TEREA WHITE

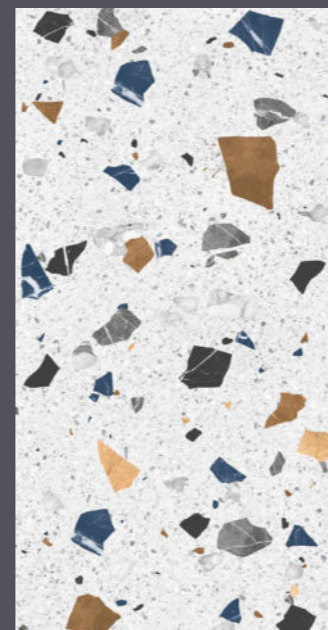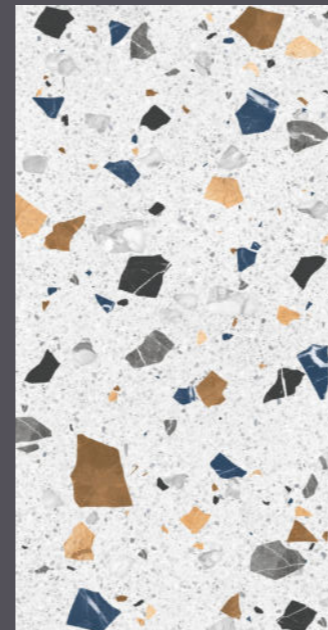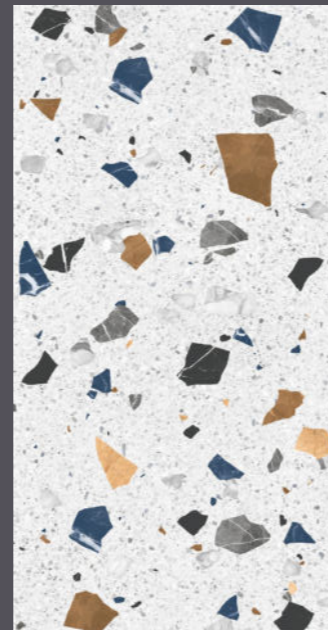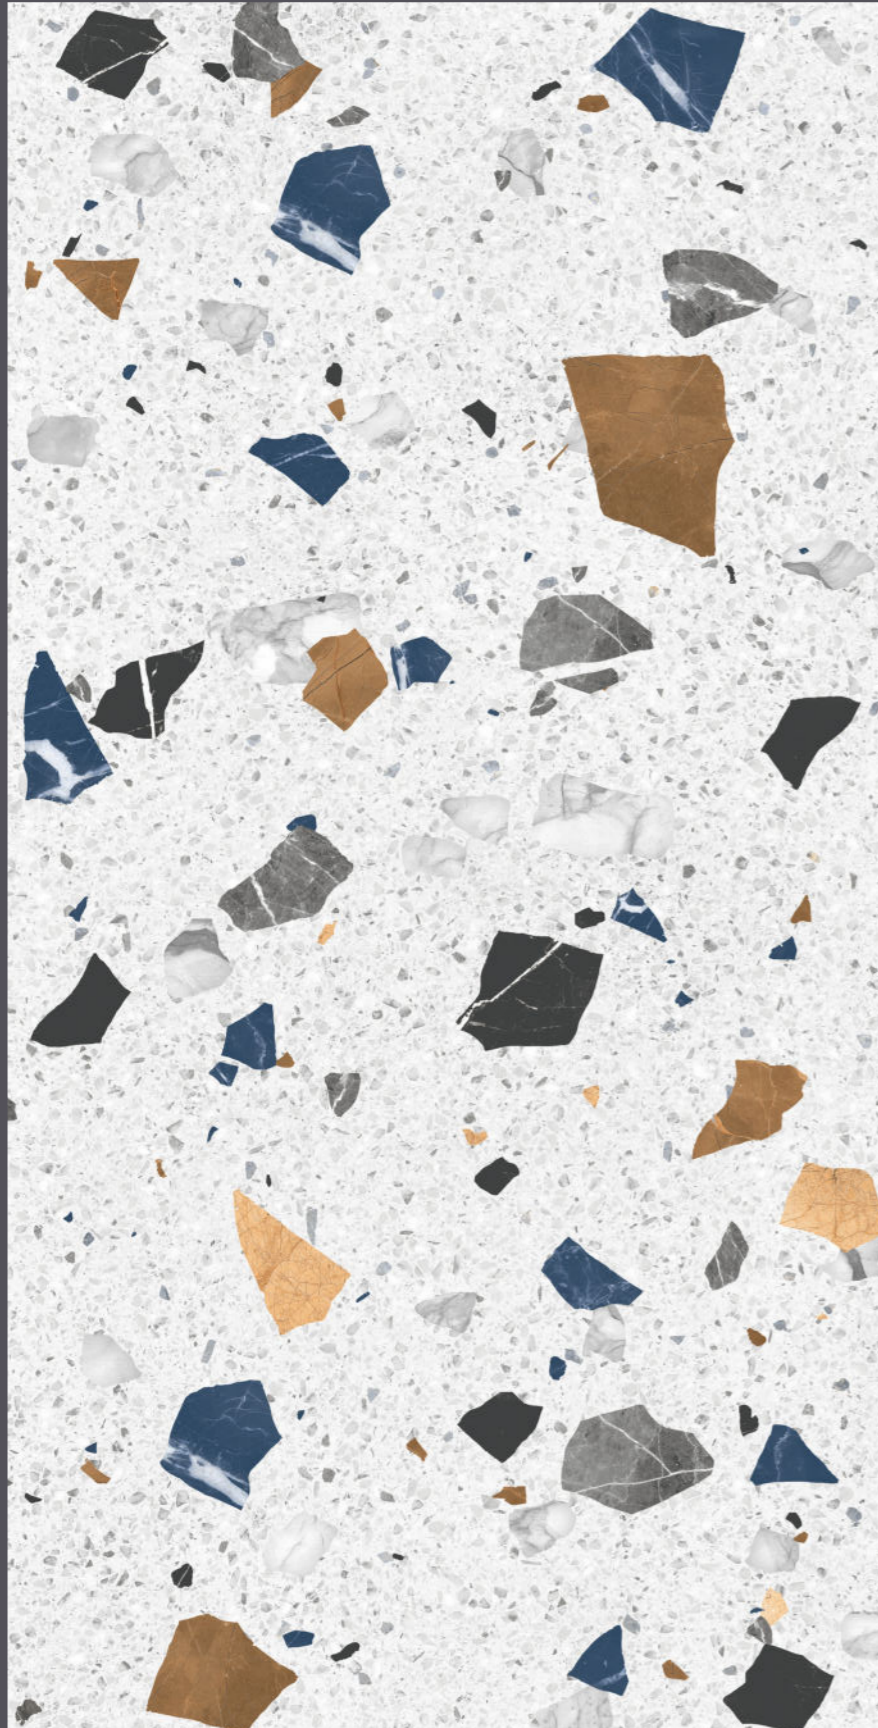

# TEREA WHITE

600X<sup>SIZE</sup>  
1200MM

MATT  
FINISH

RANDOM  
03

GLAZED  
VITRIFIED TILES



High  
Strength



Easy to  
Install



<0.05% Water  
Absorption



Random  
Design



TRAVERTINO NATURAL



# TRAVERTINO NATURAL |

600X<sup>SIZE</sup>  
1200MM

**MATT**  
FINISH

**RANDOM**  
04

**GLAZED**  
VITRIFIED TILES



High  
Strength



Easy to  
Install



<0.05% Water  
Absorption



Random  
Design

60X120CM | GLAZED PORCELAIN TILES TECHNICAL DETAILS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	MEAN VALUE OF VOYATI	TEST METHOD
<b>REGULATORY PROPERTIES</b>			
Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.50%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.20%	ISO-10545-2
Color Differences	Unaltered	No Change	ISO-10545-16
Glossiness	As per Mfg.	Min. 90%	GLOSSOMETER
<b>STRUCTURAL PROPERTIES</b>			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.00 g/cc	> 2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>			
Modulus of Rupture	Min. 35N/mm <sup>2</sup>	Min. 40N/mm <sup>2</sup>	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>			
Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
Moh's Hardness	As Per Mfg.	Min. 4	EN 101
<b>THERMO HYDROMETRIC PROPERTIES</b>			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion(COE)	Max 9.0x10 <sup>-6</sup>	Max 6.5x10 <sup>-6</sup>	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistant	Resistant	ISO-10545-14
<b>SAFETY PROPERTIES</b>			
Slip Resistance	>0.40	>0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As Per Mfg.	Does not yield Pb & Cd	ISO-10545-15

**VOYATI**  
CERAMICS

**PACKING DETAIL**

Size	Pcs. / Box	Coverage Area / Box	Weight / Box
60x120 (24"x48")	2	1.44 sq. mtr.	26 kg.



# VOYATI

C E R A M I C S

Max Granito Pvt. Ltd.

8-A National Highway, B/h 132kV Substation,  
Jambudiya, Morbi - 363 642, Gujarat, INDIA

[info@voyati.in](mailto:info@voyati.in) | [+91 84694 59999](tel:+918469459999) | [www.voyati.in](http://www.voyati.in)

