
ALLURE
OF OUR RETRO
MATT TILE



60x
60cm



Size :

60x60cm

(GLAZED VITRIFIED TILES)

Finish :

Matt

Thickness :

8.5 MM



Redefining Aesthetic

Surface and finish with the perfect equilibrium of sheen and element to anchor the environment of indulgence.



Choose our attention-grabbing
Designs for your space for
Luxury appearance.

Add a touch of elegance and
Sophistication to any space.
A stunning range of Matt tiles
With a reflective finish that
Creates a sparkling effect.

INTRODUCTION

MATT

collection





Matt tiles creating a stunning visual effect that
Adds depth and dimension to the space.
Also feature a subtle shimmer, adding a touch
Of glamour and luxury to any room.

MATT





ROCK STONE BROWN

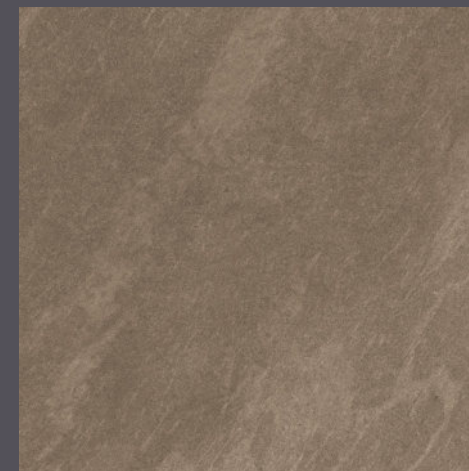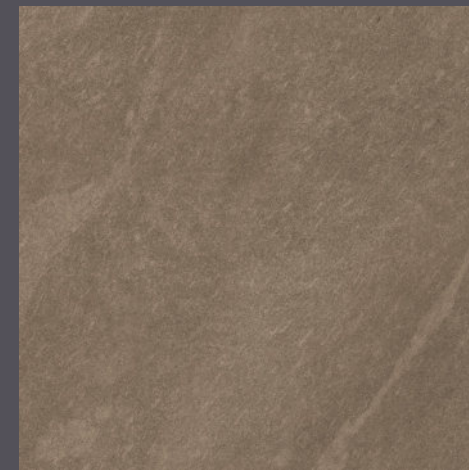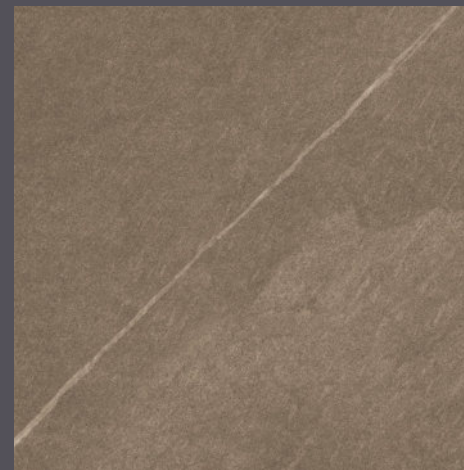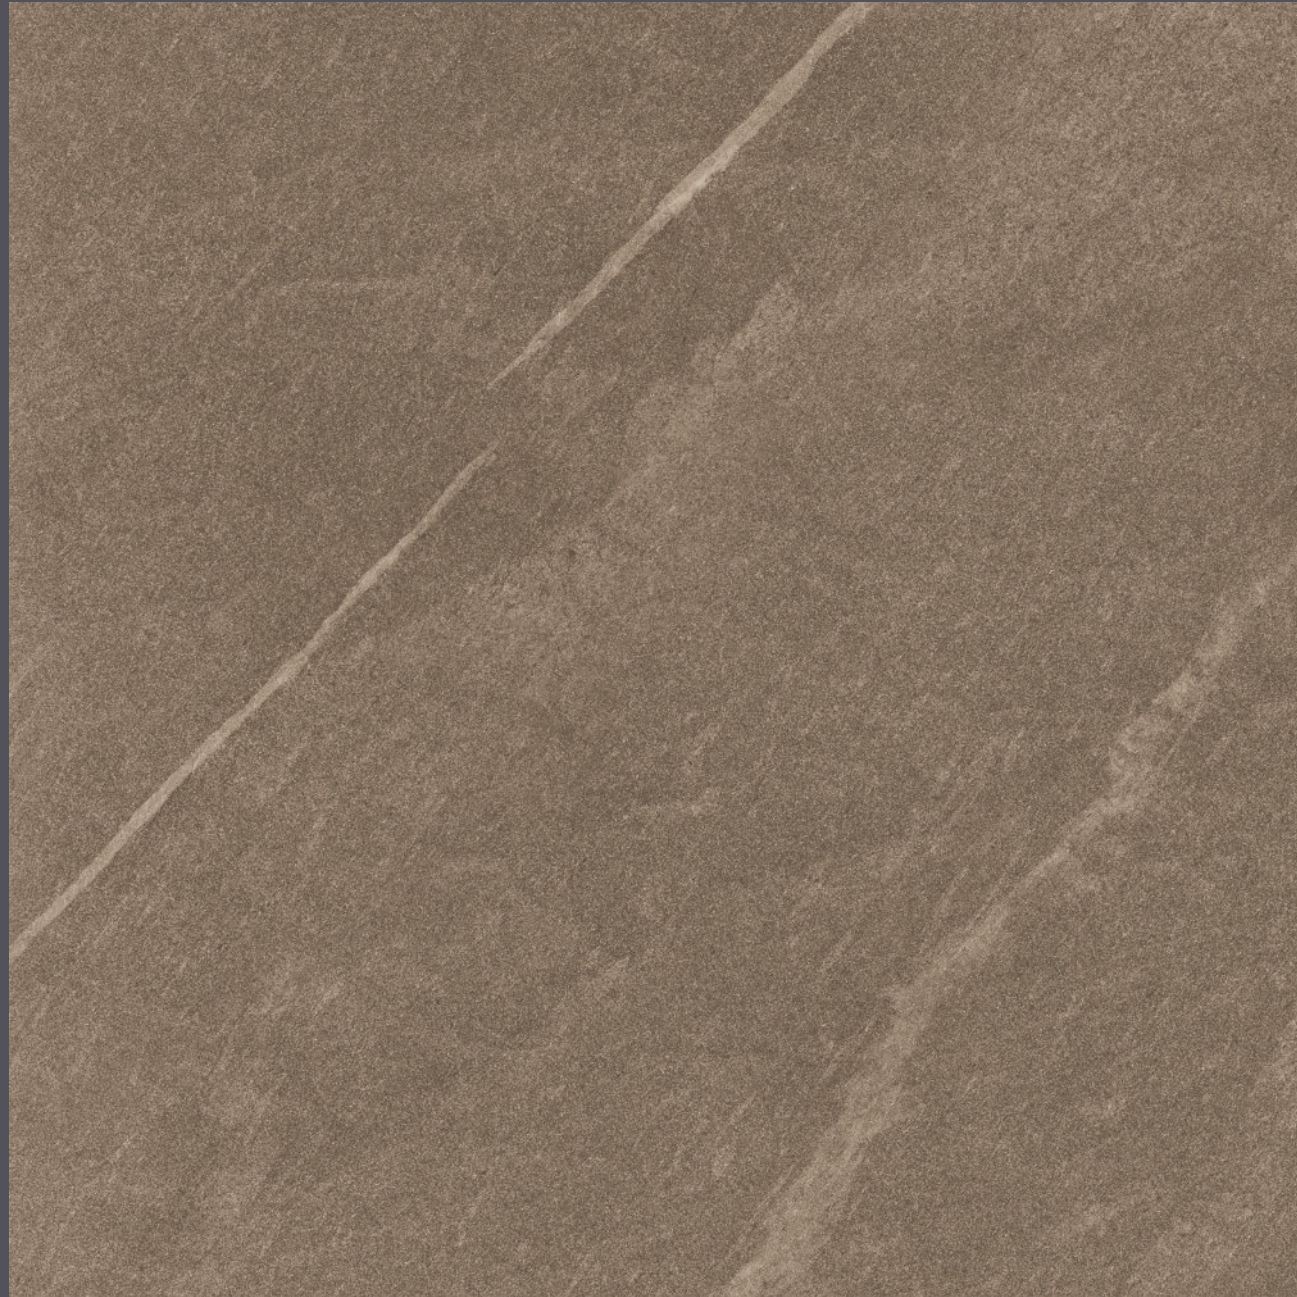

600X SIZE
600MM

GLAZED
VITRIFIED TILES

ROCK STONE BROWN

MATT
FINISH

RANDOM
05



High
Strength



Easy to
Install



<0.05% Water
Absorption



Random
Design





600X SIZE
600MM

GLAZED
VITRIFIED TILES

ROCK STONE CREMA

MATT
FINISH

RANDOM
05



High
Strength



Easy to
Install






<0.05% Water
Absorption



Random
Design



ROCK STONE GREY

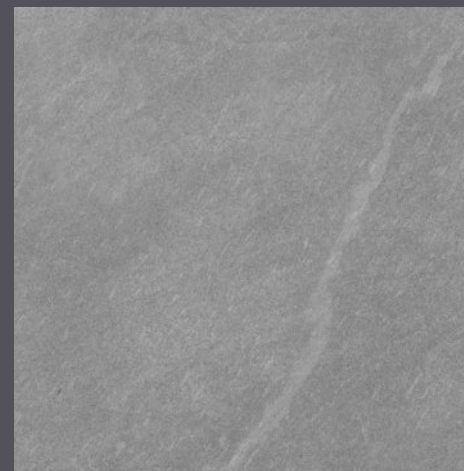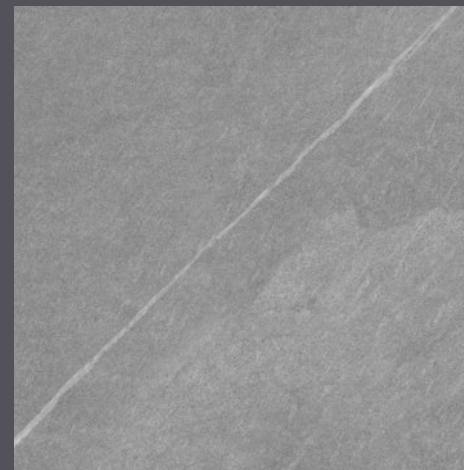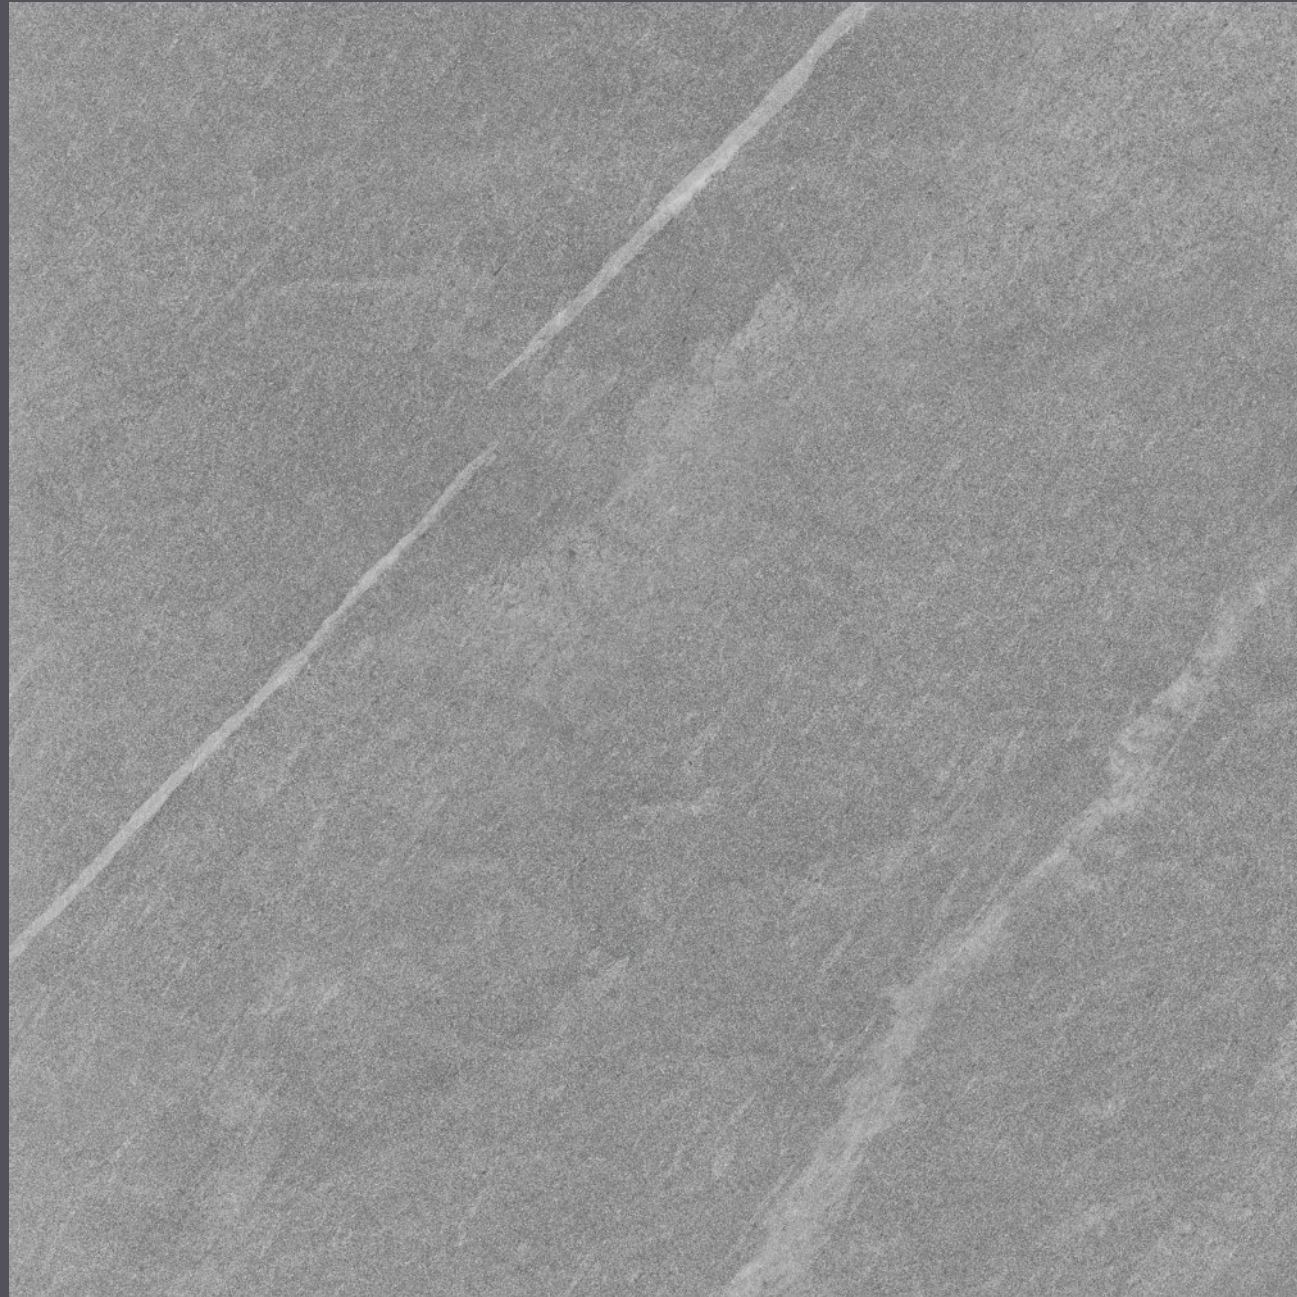

600X SIZE
600MM

GLAZED
VITRIFIED TILES

ROCK STONE GREY

MATT
FINISH

RANDOM
05



High
Strength



Easy to
Install



<0.05% Water
Absorption



Random
Design

GLAZED PORCELAIN TILES TECHNICAL DETAILS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	MEAN VALUE OF VOYATI	TEST METHOD
REGULATORY PROPERTIES			
Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.50%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.20%	ISO-10545-2
Color Differences	Unaltered	No Change	ISO-10545-16
Glossiness	As per Mfg.	Min. 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water Absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent Density	> 2.00 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of Rupture	Min. 35N/mm ²	Min. 40N/mm ²	ISO-10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
Moh's Hardness	As Per Mfg.	Min. 4	EN 101
THERMO HYDROMETRIC PROPERTIES			
Frost Resistance	No Damage	No Damage	ISO-10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion(COE)	Max 9.0x10 ⁶	Max 6.5x10 ⁶	ISO-10545-8
Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES			
Slip Resistance	>0.40	>0.40	ISO-10545-17
Fire Resistance	As Per Mfg.	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As Per Mfg.	Does not yield Pb & Cd	ISO-10545-15



PACKING DETAILS

Size	Pcs. / Box	Coverage Area / Box	Weight / Box
60x60 / 24"x24"	4	1.44 sq. mtr.	27.5 kg.

Note: Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. however, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

VOYATI

C E R A M I C S

Max Granito Pvt. Ltd.

8-A National Highway, B/h 132kV Substation,
Jambudiya, Morbi - 363 642, Gujarat, INDIA

info@voyati.in | [+91 84694 59999](tel:+918469459999) | www.voyati.in

